


RF Attenuators




Leading the signal
all over the world

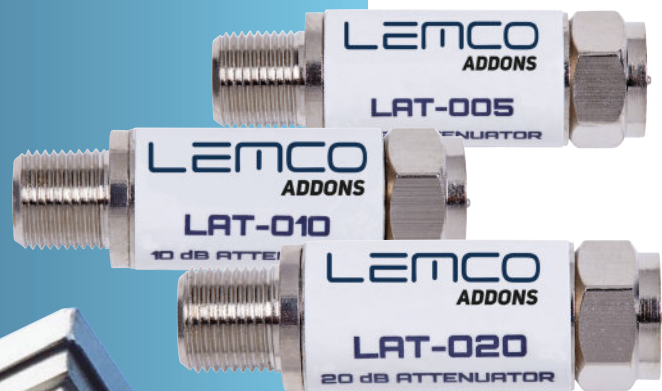

RF Attenuators

Lemco attenuators are the ultimate solution in case we need to attenuate any RF signal within an installation.

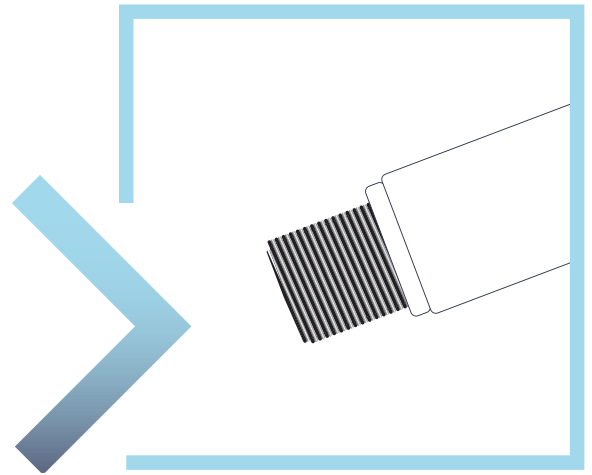

5dB attenuator F male to F female @ 75Ω

LAT-005



Technical Specifications

Electrical	
Attenuation	5dB
Frequency range	5...1000MHz
Impedance (IN/OUT)	75Ω
Insertion loss	± 1dB
Return loss	≥ 18dB

Connectors	
No of inputs	1
No of outputs	1
Connector	F-female to F-male
DC Pass	No

EAN-13	
Code	5213009761345

General	
Operating temperature	0 °C to 40°C
Storage temperature	-10 °C to +70 °C
Humidity	Up to 90%
Dimensions	42 x 13mm
Weight	33.5 gr

10dB attenuator F male to F female @ 75Ω

LAT-010



Technical Specifications

Electrical	
Attenuation	10dB
Frequency range	5...1000MHz
Impedance (IN/OUT)	75Ω
Insertion loss	± 1dB
Return loss	≥ 18dB

Connectors	
No of inputs	1
No of outputs	1
Connector	F-female to F-male
DC Pass	No

EAN-13	
Code	5213009761352

General	
Operating temperature	0 °C to 40°C
Storage temperature	-10 °C to +70 °C
Humidity	Up to 90%
Dimensions	42 x 13mm
Weight	33.5 gr

5dB attenuator F male to F female @ 75Ω

LAT-020



Technical Specifications

Electrical	
Attenuation	20dB
Frequency range	5...1000MHz
Impedance (IN/OUT)	75Ω
Insertion loss	± 1dB
Return loss	≥ 18dB

Connectors	
No of inputs	1
No of outputs	1
Connector	F-female to F-male
DC Pass	No

EAN-13	
Code	5213009761369

General	
Operating temperature	0 °C to 40°C
Storage temperature	-10 °C to +70 °C
Humidity	Up to 90%
Dimensions	42 x 13mm
Weight	33.5 gr

www.lemco.gr



Latheas 46 - 13678 Athens - Greece

+30 210 2811401, +30 210 2405237 +30 210 2825755 info@lemco.gr

follow us: @Lemco @Lemcodtv /company.lemco