

Micro Line

MLH-101

4 x HDMI to 4 x DVB-T/C



Leading the signal
all over the world




Micro Line

The MLH-101 is a very powerful, all-in-one mini headend device, able to receive up to four (4) HD signals and convert them either in four (4) x DVB-T/C RF output channels.

It supports "pool" technology, meaning that the user is able to select any program from any of the four (4) inputs and assign them to any of the four (4) RF outputs providing great flexibility.

The embedded web server of the MLH-101 provides a very friendly user interface as well as the ability of remote or local control of the device via LAN.

Its small size and its powerful features render the MLH-101 the ideal solution in case we want to distribute HD content eg. coming from STBs or blue ray to a CATV installation using the DVB-T/C.

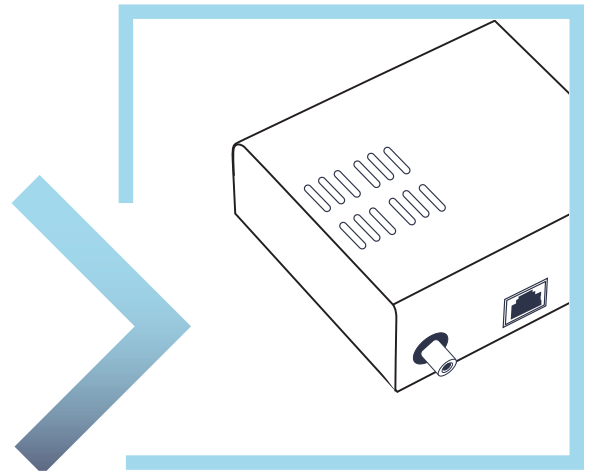

Features

- 4 x HD inputs
- HDCP v1.4 support
- 4 x RF output DVB-T/C (software selectable)
- "Pool" technology
- MER value > 42dB
- Dual power supplies offering redundancy mode
- Custom NIT/SDT
- Local or remote control via webserver
- Very friendly user interface
- Wall or rack mount options
- Ultra-compact size
- 5-year warranty



4 x HDMI to 4 x DVB-T/C

MLH-101

Technical Specifications

Input Specifications

HD Input

Type	4 x HD inputs
Video coding	MPEG-4 AVC / H.264
Profile	High profile 4.0
Input resolution	Up to 1920 x 1080 - 50/60 p & i
Output resolution	Up to 1920 x 1080 - 30p
HDCP support	Yes, v1.4

Audio

Audio	HD
Standard	MPEG-1 Layer II
Audio Bit Rate	64, 96, 128, 192, 256, 320 Kbps
Format	MPEG2, AAC, AC3

H.264 encoder

Standard	MPEG-4 AVC / H.264
Bit Rate	1 – 19 Mbps adjustable
Configurable Parameters	Service Name, Service ID
LCN processing	Yes

Output Specifications

DVB-T

Bandwidth	5, 6, 7, 8 MHz
Mode	2K, 8K
Constellation	QPSK, 16QAM, 64QAM
Guard Interval	1/4, 1/8, 1/16, 1/32
Code Rate	1/2, 2/3, 3/4, 5/6, 7/8

DVB-C

Bandwidth	5, 6, 7, 8 MHz
Mode	2K, 8K
Constellation	16QAM, 32QAM, 64QAM, 128QAM, 256QAM
Symbol Rate	1-7.2 Ms/s



RF Output

Type	4 x RF out in adjacent channels
Output Frequencies	110...950MHz (1 Hz step)
Output Level	90dB μ V
Connector	75 Ω - F, female
Output Attenuator	0...-20dB
MER	>42dB
Output loop-through loss	<1dB

Transport Stream Processing

Services	User selection by service names
Automatic Regeneration	PAT, CAT, SDT, PMTs, EITs tables
NIT/SDT	Pass-through, Custom, Automatic
PCR	re-stamping
LCN support	Yes

Programming Interface

Ethernet webserver	Yes, embedded webserver
Speed	10/100 Mbps
Connector	RJ45
Browser compatibility	Chrome, Firefox, Safari, Opera, Edge etc. (Must support HTML v5.0)

EAN-13

Code	5213009760072
------	---------------

General

Power Supply	2 x +12VDC
Power supply consumption	2A max.
Operating Temperature	0 °C to 40 °C
Storage Temperature	-10 °C to +70 °C
Humidity	Up to 90%
Dimensions	235 x 115 x 48 mm
Weight	0.45 Kg

www.lemco.gr



Latheas 46 - 13678 Athens - Greece

+30 210 2811401, +30 210 2405237 +30 210 2825755 info@lemco.gr

follow us: @Lemco @Lemcodtv /company.lemco