

Compact Line 2

The new SCL-434CT headend from Compact Line 2 series is a very powerful, all-in-one device, able to receive up to 4x independent satellite (DVB-S/S2/S2X) signals with multi-stream support and convert them in 4x DVB-T/C RF output channels while offering 1x Gbit IPTV streaming simultaneously.


The SCL-434CT supports 4x CI interfaces, using FlexCAM technology, to be able to descramble any TV content by using the appropriate CAM (Conditional Access Module) as well as it supports "pool" technology, meaning that the user is able to select any program from any of the 4x inputs and assign it to any of the 4x RF + IP outputs providing great flexibility.

A powerful CPU (Quad core @ 1.8GHz / 2GB RAM) is responsible for controlling the device using Linux OS while providing a friendly and very fast user interface as well as the ability of remote or local control of the device via Ethernet. Its small size and powerful features render the SCL-434CT the ideal solution in the cases that we want to distribute FTA (Free-To-Air) TV programs coming from satellite (DVB-S/S2/S2X) sources with multi-stream support to a CATV installation using the DVB-T/C and IP technology.

Finally, the SCL-434CT is able to host an IPTV middleware (Flex Embedded), without the need of any external server, providing the capability to the final user to control all TV monitors in an installation (LG, Samsung, Philips and custom STBs supported) while offering a variety of different features like Live TV, Live Radio, Info channels, Cast, Weather, Alarm, EPG and many more...

Features

- 4 x independent multi-standard inputs DVB-S/S2/S2X
- Multi-stream reception support
- 4x FlexCAM (CIs can be connected at the inputs or outputs)
- 4 x RF output DVB-T/C (software selectable)
- Gbit IP streaming (up to 64 x SPTS / 4 x MPTS)
- "Pool" technology
- MER value > 40dB
- PID Filtering
- Custom NIT/SDT
- Linux OS
- Flex embedded Support
- Very friendly user interface
- Wall or rack mountable
- Compact size
- SNMP v2 support
- 5year warranty

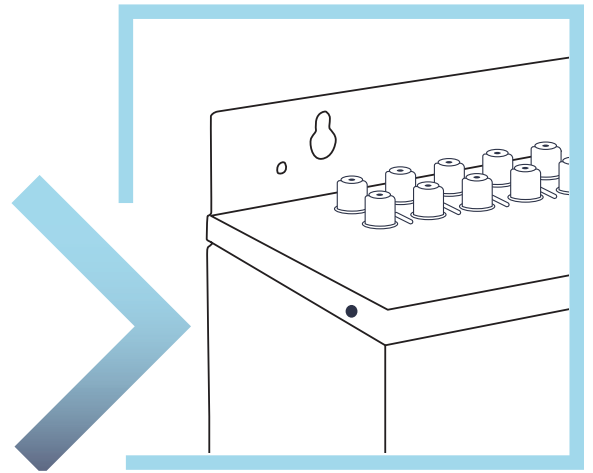

4 x DVB-S/S2/S2X+ 4xFlexCAM to 4 x DVB-T/C & IP

SCL-434CT

Technical Specifications



Input Specifications

Input	4 x DVB-S/S2/S2X	
Frequencies	950...2150 MHz	DVB-S/S2
	118...900MHz	DVB-T/T2/C
Multi-stream support	Yes	
Connector	75Ω - F, female	
CI Interfaces:	4x PCMCIA	
	Each CI can be connected at the input or output via software	

LNB

Voltage	OFF / 13V / 18V
Current	< 400mA
22 KHz signal	On / Off
-Voltage	0.65V ±0.35V
-Frequency	22 KHz ±4Hz
-DiSEqC	1.0 (Port A, B, C, D)

DVB-S

Standard	EN 300-421 V1.1.2
Symbol Rate	1 - 55 MBaud
Roll off factor	0.2, 0.25, 0.35
Code Rate	1/2, 2/3, 3/4, 5/6, 7/8 (automatic)
Spectral Inversion	Reverse, Non-reverse (automatic)

DVB-S2

Standard	EN 307-421 V1.2.1
Constellation	QPSK, 8PSK (automatic)
Symbol rate	1 - 55 MBaud (QPSK) 1 - 45 MBaud (8PSK)
Roll off factor	0.2, 0.25, 0.35 (automatic)
Code rate	1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 8/10 (QPSK- automatic) 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 (8PSK- automatic)
Spectral inversion	Reverse, Non-reverse (automatic)

DVB-S2X

Standard	EN302 307-1 V1.4.1
Constellation	QPSK, 8PSK (automatic)
Symbol rate	1 - 45 MBaud (QPSK) 1 - 30 MBaud (8PSK)
Roll off factor	Any 0.05 to 0.35 (automatic)
Code rate	1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 8/10 (QPSK- automatic) 3/5, 2/3, 3/4, 5/6, 8/9, 9/10 (8PSK- automatic)

Output Specifications

DVB-T

Standard	EN 300-744
Bandwidth	5, 6, 7, 8 MHz
Mode	2K, 8K
Constellation	QPSK, 16QAM, 64QAM
Guard interval	1/4, 1/8, 1/16, 1/32
Code rate	1/2, 2/3, 3/4, 5/6, 7/8

ITU-T J.83

Standard	Annex A(DVB-C)
Bandwidth	5, 6, 7, 8 MHz
Mode	2K, 8K
Constellation	16QAM, 32QAM, 64QAM, 128QAM, 256QAM
Symbol rate	1-7.2 Ms/s

RF Output

Type	4 x RF out in adjacent channels
Output Frequencies	110...950 MHz (1 Hz step)
Output Level	90dBμV
Connector	75Ω - F, female
Output Attenuator	0...-20dB
MER	>42dB
Output loop-through loss	<1dB

Transport Stream Processing

Services	User selection by service names
Automatic Regeneration	PAT, CAT, SDT, PMTs, EITs tables
NIT/SDT	Pass-through, custom, automatic
PCR	re-stamping
LCN support	Yes
Bypass Mode:	Yes

IP Streaming

IP TS Out	Yes
Protocol	UDP / RTP (Multicast/Unicast)
Speed	1Gbit
IGMP support	Yes, v2, v3
Type	MPTS (up to 4 TS) SPTS (up to 64 programs)
Max. Bitrate	80Mbps max. (in IP only mode)

Programming Interface

Operating system	Linux
Ethernet webserver	Yes, embedded webserver
Speed	100/1000 Mbps
Connector	RJ45
Browser compatibility	Chrome, Firefox, Safari, Opera, Edge etc. (Must support HTML v5.0)

General

Power Supply	108 to 240 VAC 50/60Hz
Power supply consumption	55 VA max.
Operating Temperature	0 °C to 40 °C
Storage Temperature	-10 °C to +70 °C
Humidity	Up to 90%
Dimensions	296.2 x 204.50 x 106 mm
Weight	1.7 Kg

EAN: 5213009761321

www.lemco.gr



Latheas 46 - 13678 Athens - Greece

+30 210 2811401, +30 210 2405237 +30 210 2825755 info@lemco.gr

follow us: @Lemco @Lemcodtv /company.lemco

